



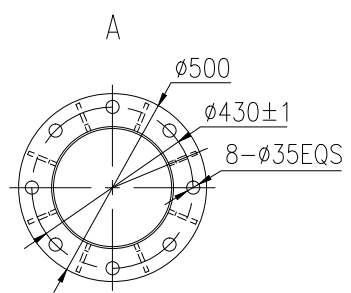



- Notes:
1. The quality of welding operation should be ensured in according to the national standard GB/T 12467.
 2. The surface of the part shall be treated with hot galvanization after welding, and spray coating (white: RAL9010), total thickness of it will no less than 0.24mm.
 3. The plainness of contact surfaces should not exceed 0.35mm. the verticality between the contact surface of the flange and the body should not exceed 3mm.

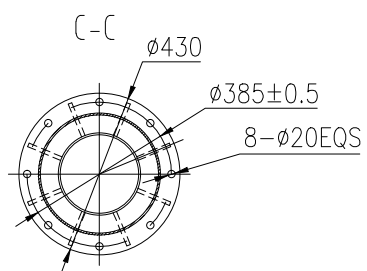

Marker	#/ty	Revision	Signature	Date
Created by			Standardized by	
Calculated by			Determined by	
Checked by			Approved by	
Technology			Date	

V-1KW 6m Tower
Q345B

TV-ICR010-06-00-A		
Pattern Mark	Weight	Scale
		1:10
Total:	Page:	